

AS-110-us **GREEN LINE** **2X COIL FITTINGS INCLUDED**

MODELS FROM THE AS-110 SERIES ARE FITTED WITH A PUMP WITH 6 M DISPLACEMENT.

These undercounter coolers AS-110 are designed for professional dispensing of beverages in restaurants and bars. Models from the AS-110 series are fitted with a pump with 6 m displacement, which allows the cooler to be placed in a cellar and still cool the beverage all the way to the tap.

The cooler meets the strictest safety and hygiene criteria, as evidenced by the number of certifications it has received. Whether the one from UL's quality and electrical safety testing laboratory or the NSF's high hygiene standards, both are intended for the US and Canadian markets. At the same time, it has a certificate of ecological refrigerant R290, so it is environmentally friendly.

| **BENEFITS AND USEFUL FEATURES**

GREEN LINE – AS 110 is fully in GREEN LINE design.

COMFORTABLY PORTABLE – easy and safe handling thanks to two stainless steel handles on the sides of the device.

EQUIPMENT – thermostat allowing smooth and precise temperature regulation, cooling coil and speedfit fittings.

AS – technology of water cooling with an icebank. This machine can provide maximum cooling output.

115V
/60Hz



R 290 
ENVIRONMENTALLY
FRIENDLY REFRIGERANT




GREEN LINE – LINDR GREEN LINE technology is environmentally friendly thanks to the use of eco-friendly refrigerant R-290. We have introduced an energy saving system in the production. Thanks to this design, each product achieves 20% higher energy efficiency and 20% lower energy consumption.

LINDR COOLING TECHNOLOGY – always more powerful than its electric input power.

CONSTRUCTION AND SERVICING – the modern arrangement of LINDR cooling technology ensures ease of access for potential servicing and maintenance.

PERFORMANCE, QUALITY, SIZE – the best performance/ quality/ size ratio.

TECHNICAL PARAMETERS

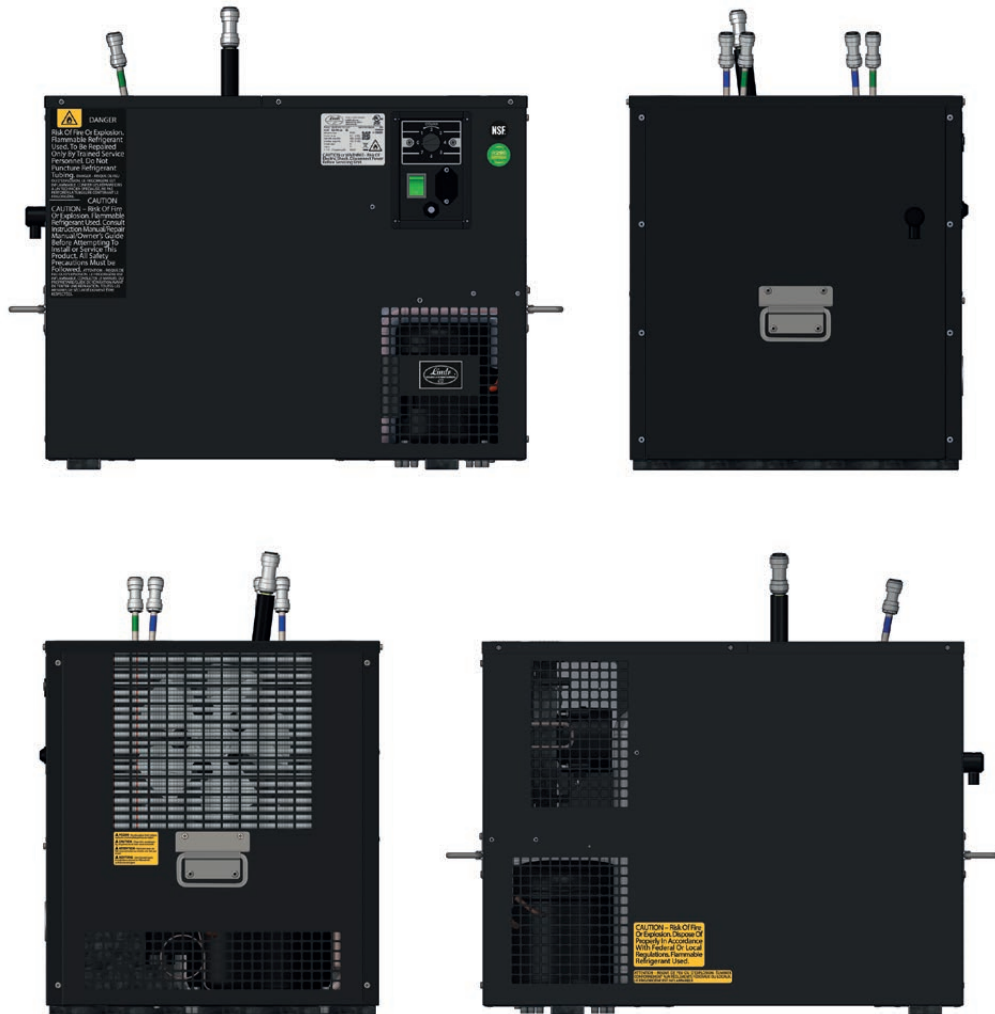

PRODUCT MODEL

AS-110-US GREEN LINE 2XCOIL FITTINGS INCLUDED 

COOLING POWER OF THE COMPRESSOR (HP)	1/5
COOLING POWER OF THE COMPRESSOR (W)	820
MAXIMUM COOLING CAPACITY TO 0°C / TK 45°C (L/HOUR)	110
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	60
THERMAL GRADIENT ΔT (°C)	10
AIR COMPRESSOR	NO
ICE BANK (KG)	30
DISPLACEMENT OF RECIRCULATION PUMP (M)	6
RECIRCULATION CONNECTION	12,7MM (1/2")
NUMBER OF COOLED BEVERAGES	2
LENGTH OF COOLING COILS (M)	14/14
DIAMETER OF COOLING COIL (MM)	7X8
POWER (W)	805
AMPERAGE (A)	7,00
NET WEIGHT (KG)	34,0
REFRIGERANT TYPE	R290
VOLTAGE (V)	115V 60HZ-1
BEVERAGE CONNECTION (PLASTIC FITTINGS)	9,5MM (3/8")

