

PORTABLE AND POWERFUL. TWO WORDS THAT CAN BEST DESCRIBE THE COOLERS OF THE PYGMY NEW GREEN LINE SERIES.



CZECH UP YOUR BEER
COOLING AND DISPENSING SYSTEMS

INNOVATION & DESIGN

All PYGMY NEW GREEN LINE coolers are certified according to the latest safety and hygiene standards for all European markets.




PYGMY 25/K NEW



PYGMY 25/K NEW GREEN LINE

The PYGMY 25/K NEW GREEN LINE dispensing machine is a top product among small portable coolers. It has everything that makes it the star of every celebration, garden party or just sitting with friends - compact size (with built-in compressor) and adequate performance. Thanks to all this, you can enjoy professionally chilled, draft and served beer or any other beverage in your home environment. The NEW mark is carried by coolers innovated according to the latest Czech and European safety and hygiene standards.

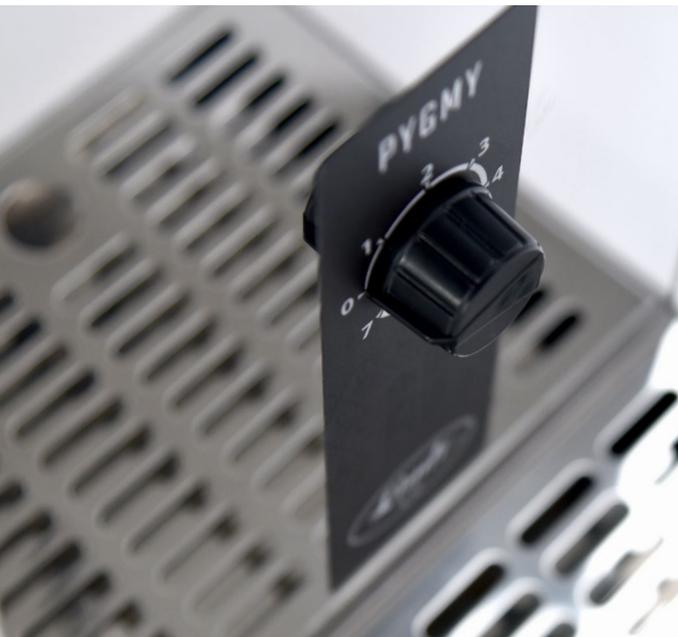

<< PYGMY 25/K NEW GREEN LINE
TEMPERATURE CONTROL – The standard supplied part is a thermostat enabling continuous and precise regulation of the beverage temperature.

< PYGMY 25/K NEW GREEN LINE
EASY CONNECTION – Each machine is equipped with speed fitting for easy connection of tubes.

| BENEFITS AND USEFUL FEATURES

INNOVATION – All our contact coolers are constantly evolving and meet all the latest safety standards and certifications (Czech and European).

PERFORMANCE – The PYGMY 25/K GREEN LINE NEW with its increased continuous output 25-35l/h, enables the continuous serving of 50-70 high-quality chilled beverages during one hour.

GREEN LINE – LINDR GREEN LINE technology is environmentally friendly thanks to the use of eco-friendly refrigerant R-290. Thanks to this design, each product achieves 20% higher energy efficiency and 20 % lower energy consumption. We have introduced an energy saving system in the production.

BEVERAGE VOLUME IN THE COOLING BLOCK - A characteristic feature of our coolers is the large volume of beverage in the cooling block. Even the smallest models in the PYGMY series have a minimum of 0.5 l. The uniform inner diameter of the cooling coil (7 mm) from the dispense head to the tap guarantees cleanliness and optimal beverage flow.

COOLING SPEED – The unique design of the cooling block with a perfectly tuned circuit guarantees not only the cooling of the beverage within a few minutes of switching on, but also the maintenance of a constant temperature if several beverages are dispensed in a short time.

AIR FILTER – Because the quality of the dispensed beverage comes first for us, all our dispensing machines with a built-in air compressor are equipped with a molecular filter for incoming air.

COOLED TAP – You will appreciate the cooled tap, for example, on hot summer days, when it guarantees the optimal temperature of the dispensed beverage, for example at a garden party.

EQUIPMENT – The standard supplied part is a thermostat enabling continuous and precise regulation of the beverage temperature, a tap, a tap wrench, a drip tray and speed fittings for easy connection.

UNIVERSAL USE – The dispensing machine can also be used in combination with a dispense tower.


STAINLESS STEEL STRUCTURE – The complete structure and cooling coils are made of stainless steel. The materials used meet the highest requirements of hygienic standards and guarantee a long life.

OVERALL COMPACTNESS – PYGMY portable coolers have the best ratio of performance, size and price on the market.




WE KNOW THAT DETAILS MATTER

CHOICE OF DISPENSING TAP

You can choose any of the classic or lever taps. The Moravo dispensing tap is a ball tap. Its robust construction guarantees a long service life.

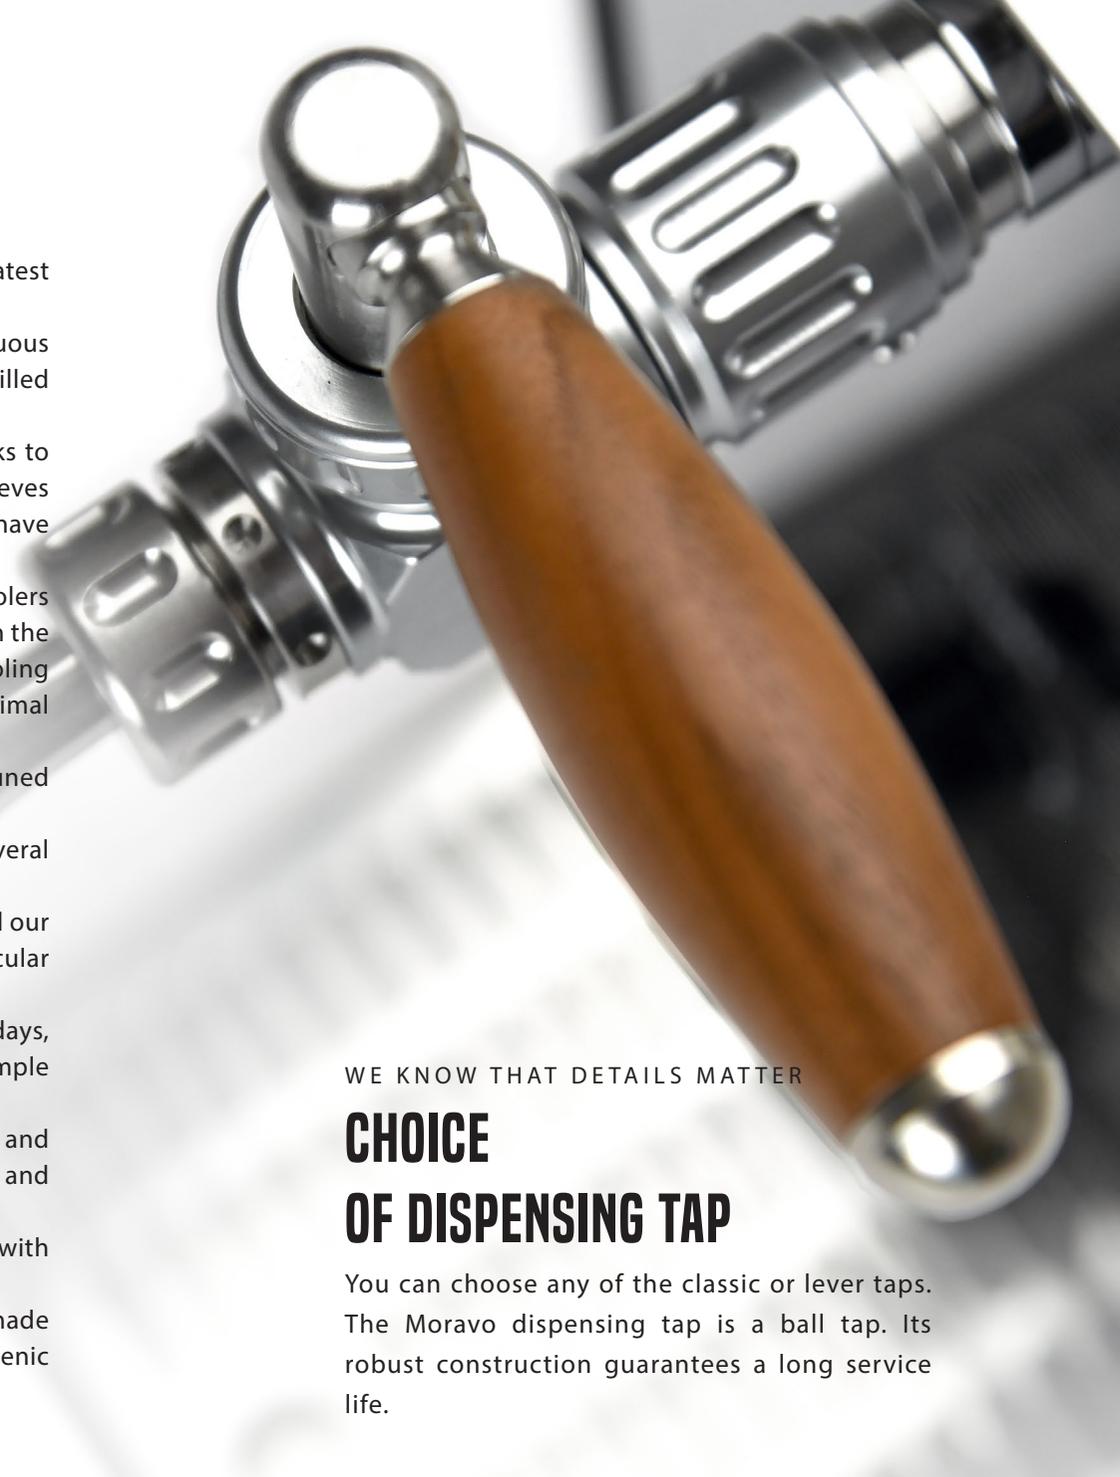

PYGMY 25/K NEW GREEN LINE

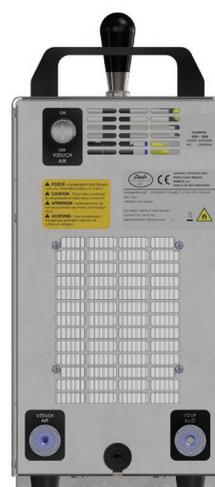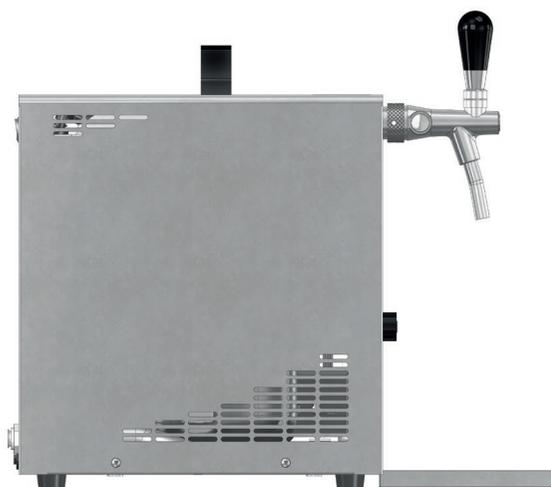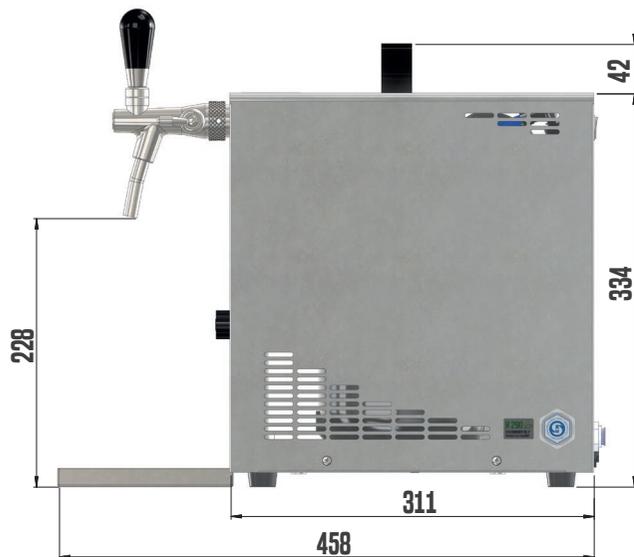

PRODUCT MODEL

PYGMY 25/K NEW GL

COOLING POWER OF THE COMPRESSOR (HP)	1/8
COOLING POWER OF THE COMPRESSOR (W)	280
MAXIMUM COOLING CAPACITY TO 0 °C / TK 45 °C (L/HOUR)	35
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	25
THERMAL GRADIENT ΔT (°C)	10
AIR COMPRESSOR (BAR)	YES
AIR COMPRESSOR PRESSURE (BAR)	AUTOMATIC 2,8-3,2
NUMBER OF TAPS (PCS)	1
NUMBER OF COOLED BEVERAGES (PCS)	1
LENGTH OF COOLING COILS (M)	11,5
DIAMETER OF COOLING COIL (MM)	7X8
POWER (W)	368
AMPERAGE (A)	1,60
NET WEIGHT (KG)	17,0
REFRIGERANT TYPE	R290
VOLTAGE (V)	220-240V 50HZ-1
BEVERAGE CONNECTION (FITTINGS)	9,5MM (3/8")
AIR CONNECTION (FITTINGS)	8MM (5/16")

CUSTOMIZED OPTIONS

CHOICE OF TAP	YES
BEVERAGE CONNECTION - STAINLESS STEEL SCREWING	YES
AIR CONNECTION - STAINLESS STEEL SCREWING	YES
POWER CABLE PLUG	YES