

# PYGMY 25/K EXCLUSIVE-US

THE TECHNOLOGY IS BASED ON THE PYGMY SERIES. ITS USE IS THEREFORE MAINLY IN PLACES WHERE APPEARANCE REALLY MATTERS.



CZECH UP YOUR BEER  
COOLING AND DISPENSING SYSTEMS

## BACKLIT LED PANEL & DESIGN

The main advantage of the PYGMY 25/K EXCLUSIVE-us GREEN LINE 2x TAP dispensing machine is undoubtedly the modern and elegant look.



115V  
/60Hz

# PYGMY 25/K EXCLUSIVE-us

## GREEN LINE

The main advantage of the PYGMY 25/K EXCLUSIVE-us GREEN LINE 2x TAP dispensing machine is undoubtedly the modern and elegant look. The technology is based on the PYGMY series. Its use is therefore mainly in places where appearance really matters. That's why the front backlit panel is completely under your control so that it is as suitable as possible for the occasion where the dispensing machine will be used. It will find its place mainly at smaller private events, presentations and meetings.

The cooler meets the strictest safety and hygiene criteria, as evidenced by the number of certifications it has received. Whether the one from UL's quality and electrical safety testing laboratory or the NSF's high hygiene standards, both are intended for the US and Canadian markets. At the same time, it has a certificate of ecological refrigerant R290, so it is environmentally friendly.



### << BACK CONTROL PANEL

We have hidden all the controls on the back of the cooler so that they are perfectly accessible, but at the same time remain hidden.

### < ONE OR TWO TAPS?

The PYGMY EXCLUSIVE series consists of two coolers - with one or two taps. The two tap model is the most compact two tap cooler on the market. We have recently extended the cooling coils to 2 x 9 m, thanks to which you will get the opportunity to dispense two well-chilled drinks. And it doesn't have to be just beer, but wine, cider, prosecco or lemonade.

# | BENEFITS AND USEFUL FEATURES

**DESIGN** – The cooler have a luxurious design with a backlit front panel and clean stainless steel lines, which unobtrusively underline the overall elegance.

**INDIVIDUAL ADJUSTMENTS** - You can design the motif of the front backlit panel yourself or we will be happy to help you with it. The basic color of the backlight is white, at your request we are able to backlight the panel with other colors.

**GREEN LINE** – LINDR GREEN LINE technology is environmentally friendly thanks to the use of eco-friendly refrigerant R-290. Thanks to this design, each product achieves 20 % higher energy efficiency and 20 % lower energy consumption. We have introduced an energy saving system in the production.

**EXTENDED COOLING COILS** - Thanks to the innovated interior of the cooler, we have managed to extend the total length of the cooling coils to 18 meters, so you can easily turn two perfectly chilled beers with a volume of 0.4 l in a row with this cooler.

**THERMOBLOCK LINDR** – a modern compressor cooling unit using input energy for direct conversion to cold. This guarantees minimum energy consumption. High-quality chilled beer is ready within minutes of connecting the machine.

**COOLING SPEED** - The unique design of the cooling block with a perfectly tuned circuit guarantees not only the cooling of the beverage within a few minutes of switching on, but also the maintenance of a constant temperature if several beverages are dispensed in a short time.

**BEVERAGE VOLUME IN THE COOLING BLOCK** - A characteristic feature of our coolers is the large volume of beverage in the cooling block. Even the smallest models in the PYGMY series have a minimum of 0.5 l. The uniform inner diameter of the cooling coil (7 mm) from the dispense head to the tap guarantees cleanliness and optimal beverage flow.

**AIR COMPRESSOR** – The models are equipped with a high-quality built-in air compressor, which, thanks to its quiet operation, is also suitable for more intimate events without disturbing the surrounding atmosphere.

**AIR FILTER** - Because the quality of the dispensed beverage comes first for us, all our dispensing machines with a built-in air compressor are equipped with a molecular filter for incoming air.


**STAINLESS STEEL STRUCTURE** – The complete structure and the coil are made of stainless steel. The materials used meet the highest requirements of hygienic standards and are a guarantee of long life of PYGMY 25/K EXCLUSIVE-us GREEN LINE 2x TAP.

**EQUIPMENT** – The standard supplied parts are the thermostat enabling continuous and precise regulation of the beverage temperature, tap(s), tap wrench, drip tray and quick fittings for easy connection.

WE KNOW THAT DETAILS MATTER

## DESIGN


The cooler have a luxurious design with a backlit front panel and clean stainless steel lines, which unobtrusively underline the overall elegance.

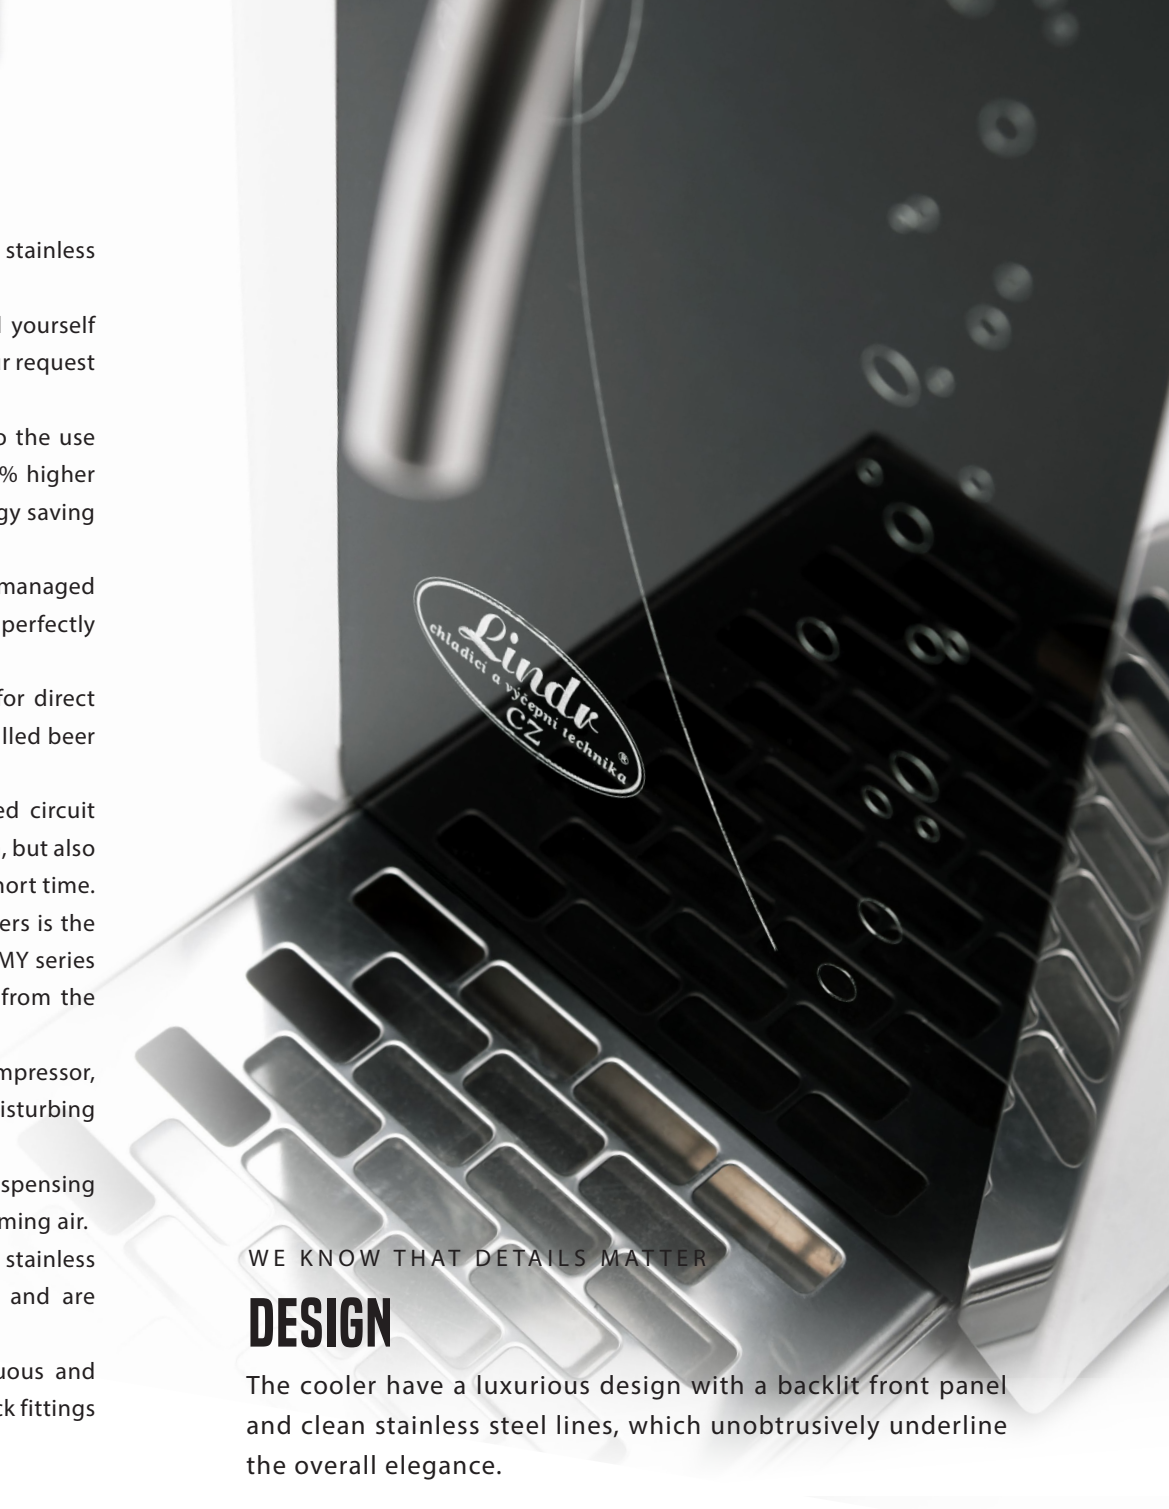



# POSSIBILITY OF INDIVIDUAL ADJUSTMENTS

We supply the front panel in a basic design with its own elegant and tasteful motif. But if you want a custom design for the panel, it's no problem. You can deliver it to us, or we will be happy to prepare it exactly according to your requirements.

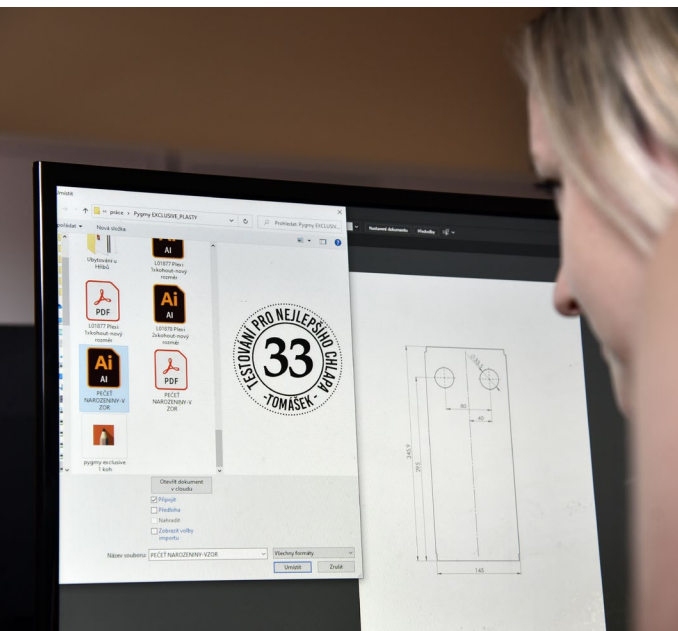



## ^ BACKLIT FRONT PANEL

We supply the front panel in a basic design with its own elegant and tasteful motif.

## < < INDIVIDUAL ADJUSTMENTS

You can design the motif of the front backlit panel yourself or we will be happy to help you with it. The basic color of the backlight is white, at your request we are able to backlight the panel with other colors.

PYGMY 25/K EXCLUSIVE-us GREEN LINE 2X TAP

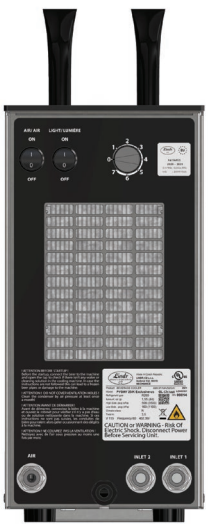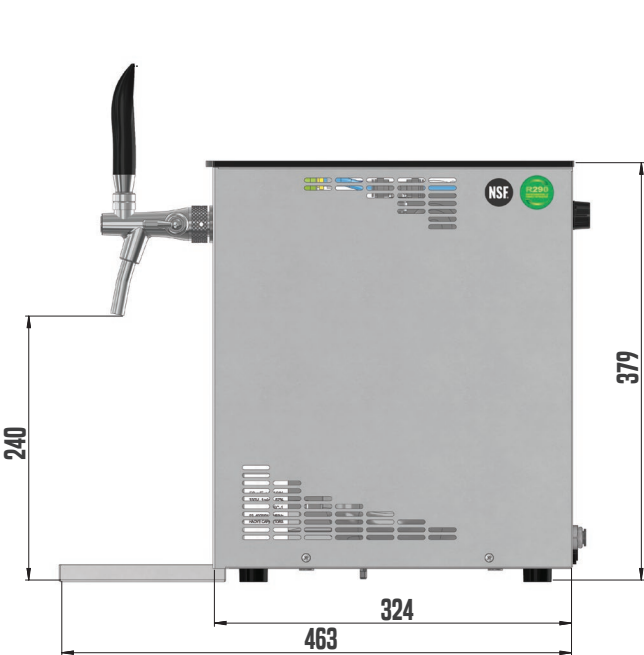

PRODUCT MODEL

PYGMY 25/K EXCLUSIVE-us GL 2X TAP

COOLING POWER OF THE COMPRESSOR (HP)	1/5
COOLING POWER OF THE COMPRESSOR (W)	390
MAXIMUM COOLING CAPACITY TO 0 °C / TK 45 °C (L/HOUR)	30
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	25
THERMAL GRADIENT ΔT (°C)	10
AIR COMPRESSOR (BAR)	YES
AIR COMPRESSOR PRESSURE (BAR)	AUTOMATIC 2,8-3,2
NUMBER OF TAPS (PCS)	2
NUMBER OF COOLED BEVERAGES (PCS)	2
LENGTH OF COOLING COILS (M)	2X9,0
DIAMETER OF COOLING COIL (MM)	7X8
POWER (W)	402,5
AMPERAGE (A)	3,50
NET WEIGHT (KG)	20,5
REFRIGERANT TYPE	R290
VOLTAGE (V)	115V 60HZ~1
BEVERAGE CONNECTION (FITTINGS)	9,5MM (3/8")
AIR CONNECTION (FITTINGS)	8MM (5/16")
MOTIVE OF LIGHTING PANEL	YES