

AS-160 INOX TROPICAL NEW MODEL


THE HIGHEST SERIES OF WATER COOLERS WITH AN ICE BANK DESIGNED FOR LARGE RESTAURANTS, PUBS AND OTHER HOSPITALITY FACILITIES.



CZECH UP YOUR
BEER | WATER | WINE | DRINK
COOLING AND DISPENSING SYSTEMS

TROPICAL CONDITIONS

AS-110 INOX TROPICAL features a thickened 45 mm insulation, even on the top cover, and is designed for extreme tropical conditions. This device can fully function even at ambient temperatures of up to 45°C.





AS-160 INOX TROPICAL NEW 4X COILS GREEN LINE

The AS-160 INOX Tropical NEW GREEN LINE under-table water coolers are fitted with standard cooling technology using an ice bank, and they are primarily used in large pubs and restaurants, at beer festivals and large events. AS-160 INOX TROPICAL features a thickened 45 mm insulation, even on the top cover, and is designed for extreme tropical conditions. This device can fully function even at ambient temperatures of up to 45°C. The design makes it easy to install, e.g. under the bar or in other premises. Their compact size, a drain valve to easily drain water from the equipment, and a water gauge to keep track of the contents are a great asset. The version with four cooling coils enables four different beverages to be cooled at the same time.



- << EASILY PORTABLE
Easy and safe handling with two stainless steel handles on the device sides.
- < THERMAL REGULATION
Thermostat for smooth and precise beverage temperature control is a standard part.

| BENEFITS AND USEFUL FEATURES

TROPICAL CONDITIONS - AS INOXTROPICAL features a thickened 45 mm insulation, even on the top cover, and is designed for extreme tropical conditions. This device can fully function even at ambient temperatures of up to 45°C.

INNOVATION – All of our water coolers undergo continuous development and meet all the latest safety standards and certifications (Czech and European).

AS TECHNOLOGY - Water cooling technology with an ice bank, where full ice supply provides maximum cooling performance.

OUTPUT - The AS NEW GREEN LINE tapping equipment, with its increased continuous output, allows for the continuous serving of quality chilled beverages in quantities corresponding to their numerical marking in litres.

AGITATOR PUMP - The cooler incorporates an agitator pump with an aftercooling pump with a discharge of 8 m.

GREEN LINE - The LINDR GREEN LINE technology is environmentally friendly thanks to the use of the eco-friendly refrigerant R-290. Thanks to this design, each product achieves 20% higher energy efficiency and 20% lower power consumption. We have introduced an energy saving system in the production.

CONSTRUCTION AND SERVICE - The modern layout of the cooling technology guarantees easy accessibility for any service and maintenance.

EQUIPMENT - Standard features include a thermostat for smooth and precise beverage temperature control, a cooling coil and quick couplers.

COMPACT DESIGN - The AS series coolers have the best output, size and price ratio on the market.






WE KNOW THAT DETAILS MATTER

DRAIN VALVE WITH LEVEL GAUGE

The cooler is fitted with a drain valve that allows easy draining of water from the unit and the water level gauge to keep track of the level.

AS-160 INOX TROPICAL NEW 4X COILS GREEN LINE

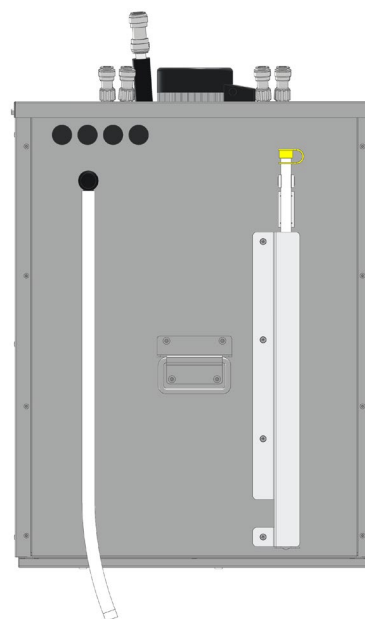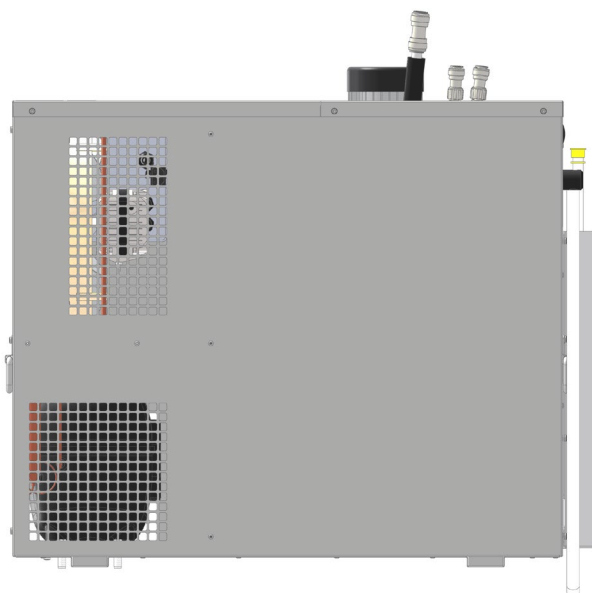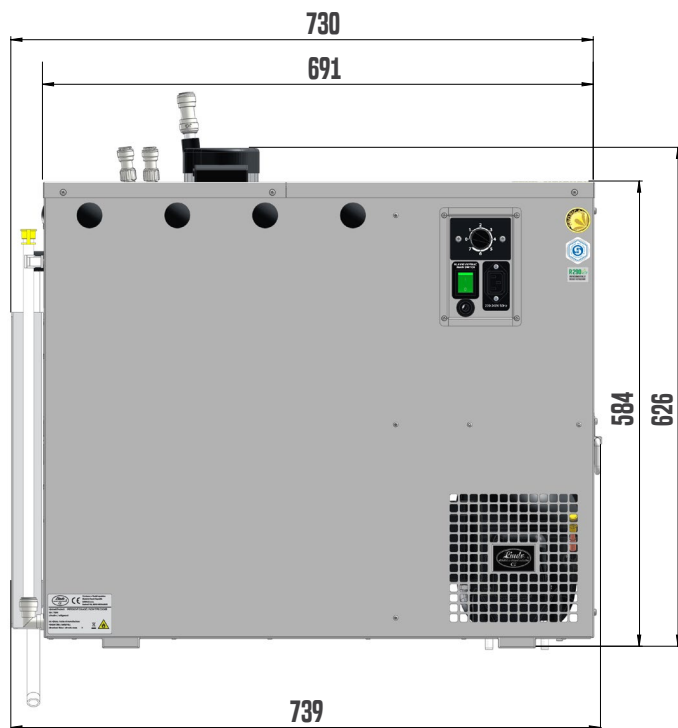

AS-160 INOX TROPICAL NEW GL	4X COILS	6X COILS	8X COILS
COOLING POWER OF THE COMPRESSOR (HP)	3/4	3/4	3/4
COOLING POWER OF THE COMPRESSOR (W)	1550	1550	1550
MAX. COOLING CAPACITY TO 0°C / TK 45°C (L/HOUR)	160	160	160
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	110	110	110
THERMAL GRADIENT ΔT (°C)	10	10	10
AIR COMPRESSOR	-	-	-
ICE BANK (KG)	10-30	10-30	10-30
DISPLACEMENT OF RECIRCULATION PUMP (M)	8	8	8
RECIRCULATION CONNECTION (FITTINGS)	1/2	1/2	1/2
NUMBER OF COOLED BEVERAGES (PCS)	4	6	8
LENGTH OF COOLING COILS (M)	2X19, 2X14	2X19, 2X14, 2X10	2X14, 2X10, 4X9,5
DIAMETER OF COOLING COIL (MM)	7X8	7X8	7X8
POWER (W)	828	828	828
AMPERAGE (A)	3,60	3,60	3,60
NET WEIGHT (KG)	46,0	48,0	48,0
REFRIGERANT TYPE	R290	R290	R290
VOLTAGE (V)	220-240V 50HZ-1	220-240V 50HZ-1	220-240V 50HZ-1
BEVERAGE CONNECTION (FITTINGS)	9,5MM (3/8")	9,5MM (3/8")	9,5MM (3/8")
AIR CONNECTION (FITTINGS)	-	-	-
WATER DRAIN WITH WATERMARK	YES	YES	YES
CUSTOMIZED OPTIONS			
CHOICE OF TAP	NO	NO	NO
STAINLESS STEEL SCREWING	NO	NO	NO
POWER CABLE PLUG	YES	YES	YES
DIGITAL THERMOSTAT	YES	YES	YES