

# EXTERNAL CARBONATOR 40L NEW

THE DEVICE IS DESIGNED FOR PRODUCING CHILLED SODA WATER BY MIXING H<sub>2</sub>O AND CO<sub>2</sub>.



**CZECH UP YOUR BEER**  
COOLING AND DISPENSING SYSTEMS

## TECHNOLOGY & BENEFITS

Professional device designed for  
producing chilled soda water.





# EXTERNAL CARBONATOR 40L NEW

The maker can produce 40 l of soda water per hour. Easy connection to collar and tap tower. Affordable solution for restaurants and other establishments serving beverages and looking to expand their existing bar with perfectly chilled sparkling water.



< EXTERNAL CARBONATOR 40L NEW  
EASY TO CARRY - Easy and safe handling and transport thanks to handles mounted on the upper part.

EXTERNAL CARBONATOR 40L NEW >  
EASY CONNECTION - Easy installation thanks to fittings located on the device.

## | BENEFITS AND USEFUL FEATURES

**INNOVATION** – All our devices are constantly evolving and meet all the latest safety standards and certifications (Czech and European).


**PERFORMANCE** – The soda makers, with their increased continuous output, enable the continuous serving of high-quality chilled beverages in quantities corresponding to their numbering in liters.

**CONSTRUCTION AND SERVICE** – The modern layout of the cooling technology guarantees easy accessibility for any service and maintenance.

**OVERALL COMPACTNESS** – soda makers have the best ratio of performance, size and price on the market. **EASY TO CARRY** - Easy and safe handling and transport thanks to handles mounted on the upper part.



# EXTERNAL CARBONATOR 40L NEW

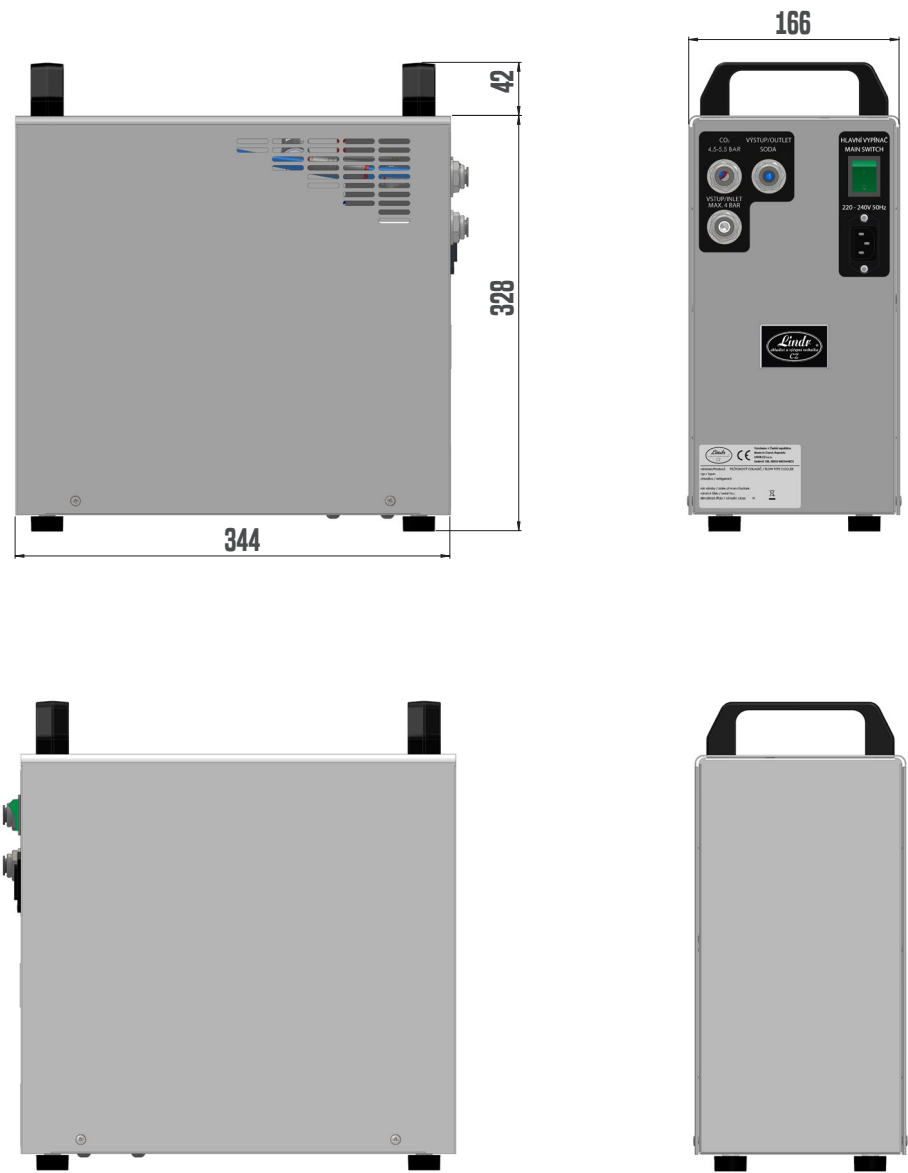

PRODUCT MODEL	EXTERNAL CARBONATOR 40L NEW
COOLING POWER OF THE COMPRESSOR (HP)	-
COOLING POWER OF THE COMPRESSOR (W)	-
MAXIMUM COOLING CAPACITY TO 0°C / TK 45°C (L/HOUR)	-
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	-
THERMAL GRADIENT ΔT (°C)	-
AIR COMPRESSOR	NO
ICE BANK (KG)	-
NUMBER OF TAPS (PCS)	-
NUMBER OF COOLED BEVERAGES	SODA
CARBONATED WATER (L/HOUR)	40
LENGTH OF COOLING COILS (M)	-
POWER (W)	368
AMPERAGE (A)	1,6
NET WEIGHT (KG)	10,5
REFRIGERANT TYPE	-
VOLTAGE (V)	220-240V 50HZ~1
BEVERAGE CONNECTION (FITTINGS)	WATER 3/8
CO2 CONNECTION (FITTINGS)	5/16
OUTPUT (FITTINGS)	SODA 3/8
CUSTOMIZED OPTIONS	
CHOICE OF TAP	NO
CONNECTION - STAINLESS STEEL SCREWING	YES
MOTIVE OF LIGHTING PANEL	NO
POWER CABLE PLUG	YES

