

DCL 1 TO DCL 4 CONFIGURATIONS CAN BE ASSEMBLED FROM UP TO FOUR MODULES IN VARIOUS COMBINATIONS.



**CZECH UP YOUR**  
**BEER | WATER | WINE | DRINK**  
COOLING AND DISPENSING SYSTEMS

## DCL – MODULAR BOTTLE COOLER

High-end Backbar Cooler



**GREENline**

## *DCL Combi Line – Modular Bottle Cooling System for Professional Bars.*


# DCL MODELS MODULAR BOTTLE COOLERS

DCL 1 to DCL 4 configurations can be assembled from up to four modules in various combinations. The units are supplied fully assembled according to customer requirements and ready for professional operation. The ventilated cooling system ensures rapid cooling of beverages and uniform distribution of cold air throughout the entire cabinet. In the DCL 4 configuration, the distribution of cold air is supported by a central fan system to maintain a stable temperature across all modules. Active air circulation helps maintain a constant temperature even during frequent door or drawer openings. The construction has been designed for long-term daily operation and easy integration into bar and storage areas.

The DCL series is equipped with a digital thermostat with automatic defrost and incorporates LINDR GREEN LINE technology using environmentally friendly R290 refrigerant. GREEN LINE technology utilizes modern design solutions to achieve higher energy efficiency, lower power consumption and more effective use of cooling performance. As a result, the unit delivers high performance while maintaining economical operation and environmental responsibility.

The unit is equipped with internal LED lighting that improves visibility of stored products while supporting an attractive product presentation. For configurations consisting of glass-fronted modules, the unit can also be optionally equipped with multi-colour RGB LED lighting and a controller, allowing the appearance of the unit to be adapted to the atmosphere and design of the venue.

The DCL series represents a professional modular bottle cooling system designed for bars, restaurants and modern hospitality venues. The flexible design allows the combination of different module types according to customer requirements – from standard refrigerated compartments and drawer modules to specialized modules with bottle openings.

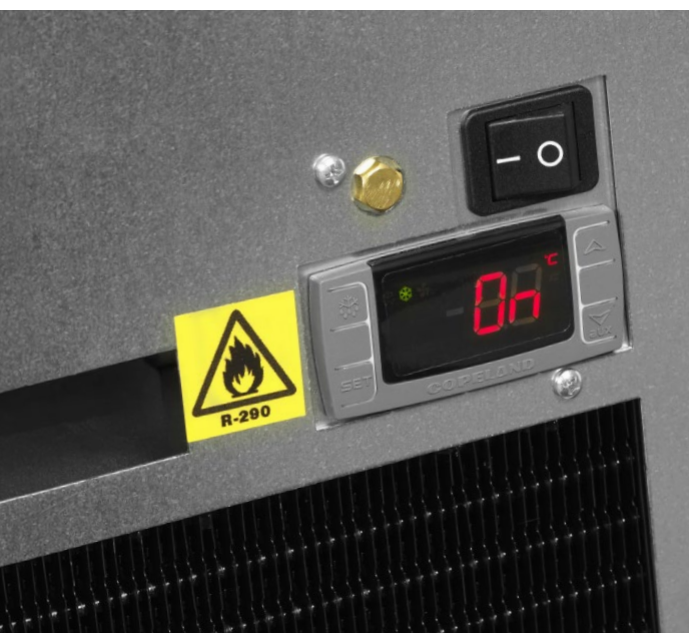

<<

The electronic thermostat with automatic defrost allows precise temperature setting and stable temperature maintenance.

<

Adjustable shelves allow you to adapt the interior space to different types and sizes of stored products.

Easy servicing is ensured by the fully removable MU cooling unit located on the right side of the cabinet. If required, the cooling unit can be quickly removed and replaced without the need to transport the entire unit from the venue, minimizing service interventions and operational downtime. The cabinet is prepared with openings for python and beer line routing, allowing easy connection to dispensing equipment or use for keg storage. Upon request, the unit can also be prepared for connection to an external central cooling system.

## | FEATURES AND BENEFITS

**MODULARITY** – The DCL system allows the combination of different module types according to the requirements of a specific installation. Available options include solid or glass-door modules, drawer modules and specialized bottle-opening modules.

**PROFESSIONAL COOLING** – The ventilated cooling system ensures efficient beverage cooling and uniform distribution of cold air throughout the entire cabinet.

**CONFIGURATION FLEXIBILITY** – DCL 1 to DCL 4 configurations allow the creation of a cooling system with up to four modules in a single unit.

**STABLE TEMPERATURE** – Active air circulation helps maintain a constant temperature even during frequent door openings or heavy operating conditions.

**READY FOR BAR INSTALLATIONS** – The cabinet is prepared with openings for python and beer line routing for easy connection to dispensing equipment.

**REMOVABLE MU UNIT** – The fully removable cooling unit allows quick servicing and replacement without the need to remove the entire unit from the venue.

**DIGITAL CONTROL** – The electronic thermostat with automatic defrost allows precise temperature setting and stable temperature maintenance.

**LED LIGHTING** – Internal LED lighting improves visibility of stored products and supports attractive product presentation. Configurations with glass-fronted modules can also be equipped with multi-colour RGB LED lighting and a controller to match the atmosphere and design of the venue.

**GREEN LINE** – LINDR GREEN LINE technology uses environmentally friendly R290 refrigerant. Thanks to this design, each product achieves up to 20% higher energy efficiency and up to 20% lower power consumption. During production, we also implement a systematic energy-saving approach.

**CUSTOM SOLUTIONS** – Upon request, the unit can be prepared for connection to an external central cooling system according to specific installation requirements.



## REMOVABLE UNIT

The fully removable cooling unit allows quick servicing and replacement without the need to remove the entire unit from the venue.

# DCL- MODULAR BOTTLE COOLER-BASIC CORPUS - 1 MODULE

GREENline









## MODEL

|                                                                            |  |  |  |  |  |  |  |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                            | NUMBER OF BOTTLES (PCS)                                                             | NUMBER OF BOTTLES (PCS)                                                             | NUMBER OF CANS (PCS)                                                                | NUMBER OF CANS (PCS)                                                                | INTERIOR LIGHT (white)                                                              | TEMPERATURE RANGE                                                                   | ENERGY CLASS                                                                        |
| DCL-1 Modular bottle cooler GL<br>(1x module+1x cooling unit)<br>DCL 00001 | 180                                                                                 | 138                                                                                 | 180                                                                                 | 145                                                                                 | YES/ WHITE                                                                          | +2/ +10                                                                             | C                                                                                   |

The flexible design allows the combination of different module types according to customer requirements – from standard refrigerated compartments and drawer modules to specialized modules with bottle openings. DCL 1 to DCL 4 configurations can be assembled from up to four modules in various combinations.

Ventilated cooling | Removable cooling unit for easy service | White LED lighting | Adjustable shelves and legs | Elegant design (anthracite exterior, silver interior) | Digital controller and temperature display | Optional lock.



# DCL- MODULAR BOTTLE COOLER-BASIC CORPUS - 2 MODULES

GREENline





| MODEL                                                                         |  NUMBER OF BOTTLES (PCS) |  NUMBER OF BOTTLES (PCS) |  NUMBER OF CANS (PCS) |  NUMBER OF CANS (PCS) |  INTERIOR LIGHT (white) |  TEMPERATURE RANGE |  ENERGY CLASS |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| DCL-2 Modular bottle cooler GL<br>(2x modules+1x cooling unit)<br>DCL 00002   | 396                                                                                                         | 306                                                                                                         | 416                                                                                                      | 335                                                                                                      | YES/ WHITE                                                                                                 | +2/ +10                                                                                               | B                                                                                                |
| DCL-2C* Modular bottle cooler GL<br>(2x modules+1x cooling unit)<br>DCL 00005 | 396                                                                                                         | 306                                                                                                         | 416                                                                                                      | 335                                                                                                      | YES/ RGB                                                                                                   | +2/ +10                                                                                               | C                                                                                                |

Various combinations of standard modules offer a wide range of possibilities. We offer a choice of 2, 3 or 4 module variants, in which modules with solid or glass doors, modules with drawers or modules with bottle openings are combined.

The bodies are equipped with white LED lighting / \* DCL-2C,3C,4C - the bodies are equipped with RGB (color) LED lighting (color and scale adjustable using the remote control).

Ventilated cooling | Removable cooling unit for easy service | LED lighting - WHITE or COLOR (RGB) with remote control | Adjustable shelves and legs | Elegant design (anthracite exterior, silver interior) | Digital controller and temperature display | Optional lock.

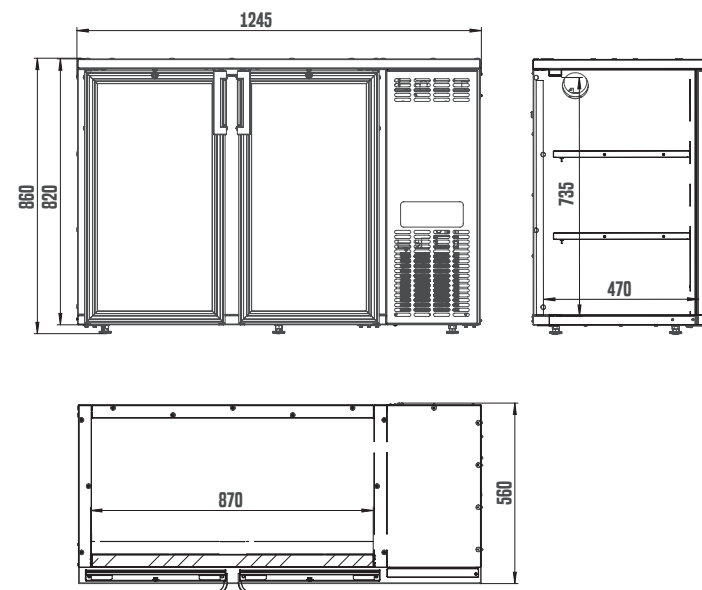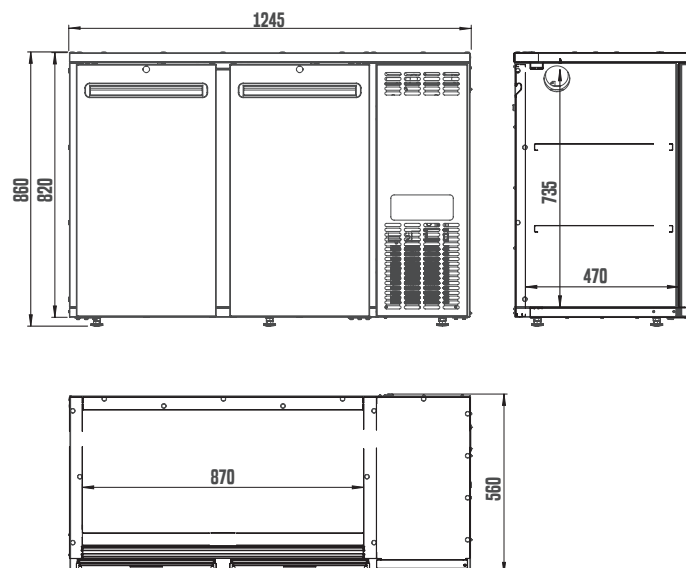

# DCL-MODULAR BOTTLE COOLER-BASIC CORPUS - 3 MODULES

GREENline





## MODEL

|                                                                               |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                               | NUMBER OF BOTTLES<br>(PCS)                                                          | NUMBER OF BOTTLES<br>(PCS)                                                          | NUMBER OF CANS<br>(PCS)                                                             | NUMBER OF CANS<br>(PCS)                                                             | INTERIOR LIGHT<br>(white)                                                           | TEMPERATURE<br>RANGE                                                                | ENERGY CLASS                                                                        |
| DCL-3 Modular bottle cooler GL<br>(3x modules+1x cooling unit)<br>DCL 00003   | 576                                                                                 | 444                                                                                 | 633                                                                                 | 510                                                                                 | YES/ WHITE                                                                          | +2/ +10                                                                             | C                                                                                   |
| DCL-3C* Modular bottle cooler GL<br>(3x modules+1x cooling unit)<br>DCL 00006 | 576                                                                                 | 444                                                                                 | 633                                                                                 | 510                                                                                 | YES/ RGB                                                                            | +2/ +10                                                                             | C                                                                                   |

Various combinations of standard modules offer a wide range of possibilities. We offer a choice of 2, 3 or 4 module variants, in which modules with solid or glass doors, modules with drawers or modules with bottle openings are combined.

The bodies are equipped with white LED lighting / \* DCL-2C,3C,4C - the bodies are equipped with RGB (color) LED lighting (color and scale adjustable using the remote control).

Ventilated cooling | Removable cooling unit for easy service | LED lighting - WHITE or COLOR (RGB) with remote control | Adjustable shelves and legs | Elegant design (anthracite exterior, silver interior) | Digital controller and temperature display | Optional lock.

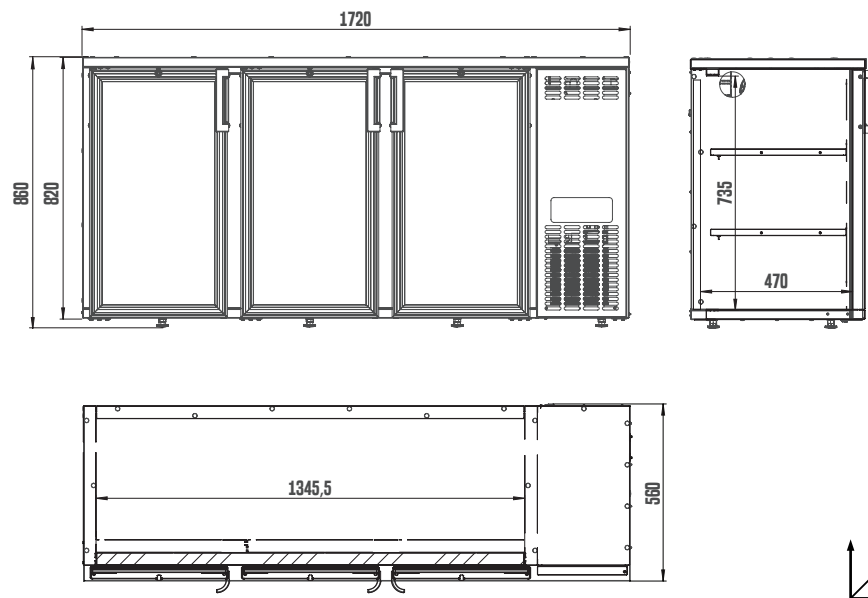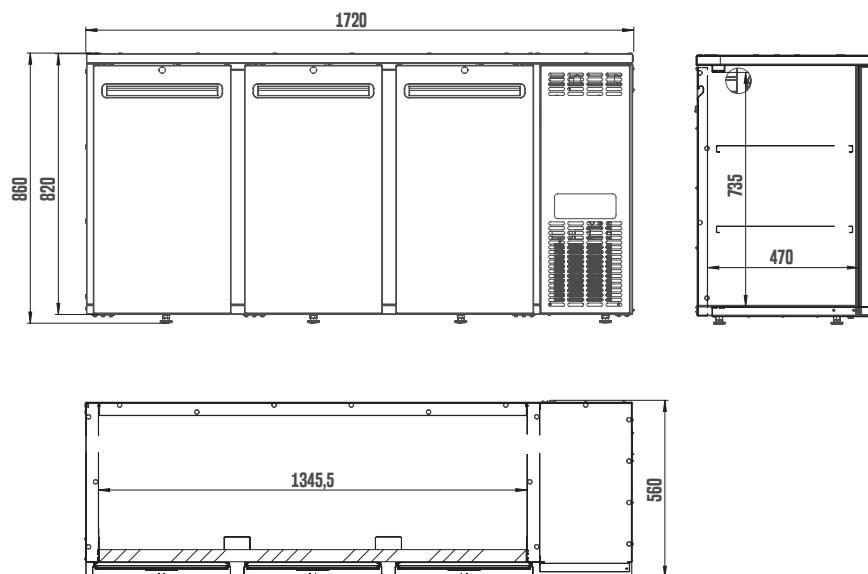

# DCL-MODULAR BOTTLE COOLER-BASIC CORPUS - 4 MODULES

GREENline









## MODEL

|                                                                               |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                               | NUMBER OF BOTTLES (PCS)                                                             | NUMBER OF BOTTLES (PCS)                                                             | NUMBER OF CANS (PCS)                                                                | NUMBER OF CANS (PCS)                                                                | INTERIOR LIGHT (white)                                                              | TEMPERATURE RANGE                                                                   | ENERGY CLASS                                                                        |
| DCL-4 Modular bottle cooler GL<br>(4x modules+1x cooling unit)<br>DCL 00004   | 792                                                                                 | 612                                                                                 | 876                                                                                 | 706                                                                                 | YES/ WHITE                                                                          | +2/ +10                                                                             | C                                                                                   |
| DCL-4C* Modular bottle cooler GL<br>(4x modules+1x cooling unit)<br>DCL 00007 | 792                                                                                 | 612                                                                                 | 876                                                                                 | 706                                                                                 | YES/ RGB                                                                            | +2/ +10                                                                             | D                                                                                   |

Various combinations of standard modules offer a wide range of possibilities. We offer a choice of 2, 3 or 4 module variants, in which modules with solid or glass doors, modules with drawers or modules with bottle openings are combined.

The bodies are equipped with white LED lighting / \* DCL-2C,3C,4C - the bodies are equipped with RGB (color) LED lighting (color and scale adjustable using the remote control).

Ventilated cooling | Removable cooling unit for easy service | LED lighting - WHITE or COLOR (RGB) with remote control | Adjustable shelves and legs | Elegant design (anthracite exterior, silver interior) | Digital controller and temperature display | Optional lock.

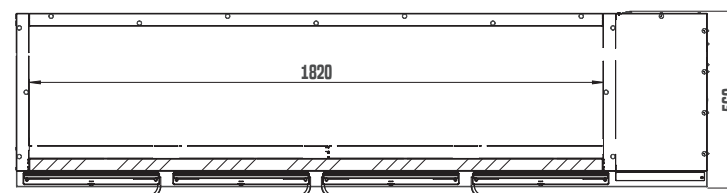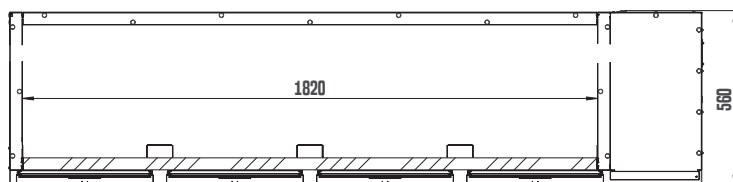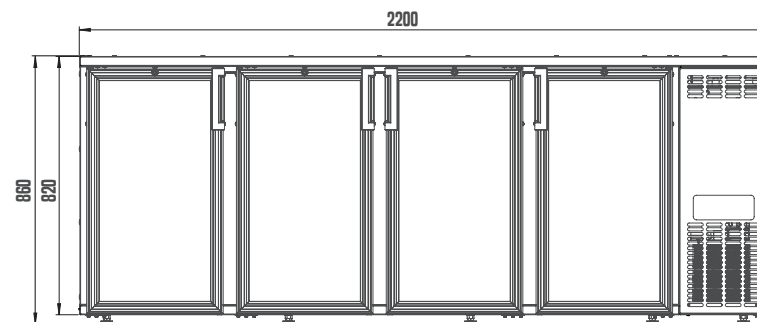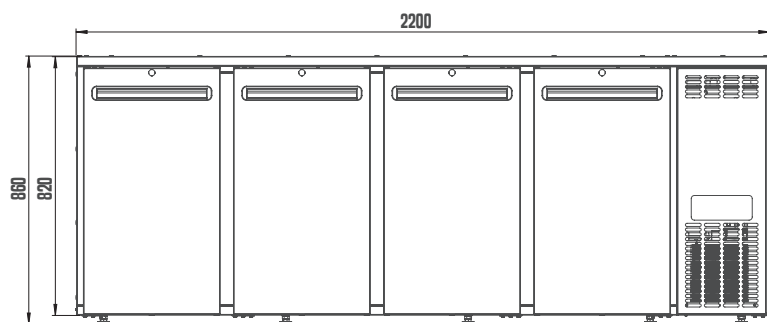

You can choose from individual modules to create the perfect bar setup for your business.

## DCL-M (MODULES)



**DCL-M1**  
Bottle rack + 1x drawer with lock  
DCL 00008

**DCL-M1-No lock**  
Bottle rack + 1x drawer  
DCL 00009




**DCL-M2L**  
Left solid door with lock  
DCL 00010

**DCL-M2L-No lock**  
Left solid door  
DCL 00011

**DCL-M2R**  
Right solid door with lock  
DCL 00013

**DCL-M2R-No lock**  
Right solid door  
DCL 00014

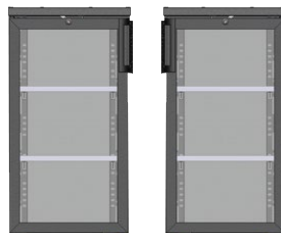

**DCL-M2LG**  
Left full glass door with lock  
DCL 00012

**DCL-M2RG**  
Right full glass door with lock  
DCL 00015



**DCL-M3**  
2x drawer - same height (50-50cm)  
DCL 00016

**DCL-M3-No lock**  
2x drawer - same height (50-50cm)  
DCL 00017

**DCL-M3G**  
2x glass drawer, same height (50-50cm)  
DCL 00018



**DCL-M5**  
2x drawer - different height (45-55cm)  
DCL 00019

**DCL-M5-No lock**  
2x drawer - different height (45-55cm)  
DCL 00020



**DCL-M6**  
3x drawer - same height (30-30-30cm)  
DCL 00021

**DCL-M6-No lock**  
drawer - same height (30-30-30cm)  
DCL 00022

**DCL-M6G**  
3x glass drawer, same height (30-30-30cm)  
DCL 00023

The DCL+ range comes with glass doors as standard, but you can customize the cabinet to fit your needs. Choose between a variety of fronts and cooling modules to build the perfect bar setup for your business. The only restriction is that the cooling unit must always be placed to the right side of the cabinet – the rest is entirely up to you.

**LED LIGHTING** – Internal LED lighting improves visibility of stored products and supports attractive product presentation. Configurations with glass-fronted modules can also be equipped with multi-colour RGB LED lighting and a controller to match the atmosphere and design of the venue.

RGB (colorful) LED lighting (color and scale adjustable via remote control).



**BODY + Module**  
**DCL-1** + DCL-M1



**BODY + Module**  
**DCL-1** + DCL-M6



**BODY + Modules**  
**DCL-2** + DCL-M2L + DCL-M2R



**BODY + Modules**  
**DCL-2** + DCL-M3 + DCL-M2R



**BODY + Modules**  
**DCL-3** + DCL-M2L + DCL-M1 + DCL-M2R



**BODY + Modules**  
**DCL-3C** + DCL-M2LG + DCL-M2LG + DCL-M2RG



**BODY + Modules**  
**DCL-4** + DCL-M6 + DCL-M6 + DCL-M2L + DCL-M2R

| TECHNICAL SPECIFICATIONS                 | DCL-1 + DCL-M2L             | DCL-1 + DCL-M2LG            | DCL-2 + DCL-M2L+M2R         | DCL-2C + DCL-M2LG+M2RG      |
|------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| GROSS / NET VOLUME (L)                   | 138/ 124                    | 138/ 124                    | 299/ 275                    | 299/ 275                    |
| GROSS / NET WEIGHT (KG)                  | 80,5/ 72,5                  | 83,5/ 75,5                  | 108/ 96,5                   | 114/ 102,5                  |
| TEMPERATURE RANGE (°C)                   | +2°C / +10°C                | +2°C / +10°C                | +2°C / +10°C                | +2°C / +10°C                |
| CLIMATE CLASS                            | 4                           | 4                           | 4                           | 4                           |
| DESIGN AND MATERIAL                      |                             |                             |                             |                             |
| BOTTOM SHELF DIMENSIONS (MM)             | 395 X 460                   | 395 X 460                   | 870 X 460                   | 870 X 460                   |
| EXTERIOR / INTERIOR FINISH (COLOUR)      | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER |
| NUMBER (PCS)/ DOOR TYPE                  | 1/ HINGED SOLID             | 1/ HINGED GLASS             | 2/ HINGED SOLID             | 2/ HINGED GLASS             |
| SHELVES NO (PCS)/ TYPE                   | 2/ ADJUSTABLE               | 2/ ADJUSTABLE               | 4/ ADJUSTABLE               | 4/ ADJUSTABLE               |
| SHELF COLOR (RAL)                        | SILVER                      | SILVER                      | SILVER                      | SILVER                      |
| SHELF DIMENSIONS V x D (MM)              | 370 X 428                   | 370 X 428                   | 370 X 428                   | 370 X 428                   |
| MAX LOAD ON SHELVES (Kg/m²)              | 180                         | 180                         | 180                         | 180                         |
| ADJUSTABLE FEET                          | YES                         | YES                         | YES                         | YES                         |
| LOCK (FACTORY OPTION)                    | YES                         | YES                         | YES                         | YES                         |
| INTERIOR LIGHT (LED)                     | YES/ WHITE                  | YES/ WHITE                  | YES/ WHITE                  | YES/ COLOUR (RGB)           |
| SEPARATE LIGHT SWITCH                    | YES                         | YES                         | YES                         | NO/ REMOTE CONTROL          |
| COOLING AND FUNCTIONS                    |                             |                             |                             |                             |
| TYP THERMOSTATU/ DIGITÁLNÍ OVLÁDÁNÍ      | ELECTRONIC/ YES             | ELECTRONIC/ YES             | ELECTRONIC/ YES             | ELECTRONIC/ YES             |
| TYPE OF COOLING                          | VENTILATED                  | VENTILATED                  | VENTILATED                  | VENTILATED                  |
| AUTOMATIC DEFROST                        | YES                         | YES                         | YES                         | YES                         |
| REFRIGERANT TYPE/ REFRIGERANT CHARGE (G) | R 290/ 80                   | R 290/ 80                   | R 290/ 80                   | R 290/ 80                   |
| POWER AND CONSUMPTION                    |                             |                             |                             |                             |
| ENERGY CLASS                             | C                           | D                           | B                           | C                           |
| ANNUAL ENERGY CONS. (KWH/ROK)            | 270                         | 463                         | 366                         | 560                         |
| ENERGY CONSUMPTION (KWH/24H)             | 0,74                        | 1,26                        | 1                           | 1,53                        |
| INPUT POWER (W)                          | 200                         | 200                         | 230                         | 230                         |
| VOLTAGE/ FREQUENCY (V/Hz)                | 220-240/ 50                 | 220-240/ 50                 | 220-240/ 50                 | 220-240/ 50                 |
| NOISE LEVEL dB (A)                       | 41                          | 41                          | 41                          | 41                          |
| DIMENSIONS                               |                             |                             |                             |                             |
| DIMENSIONS V x D x H (MM)                | 770 X 560 X 820/ 860        | 770 X 560 X 820/ 860        | 1245 X 560 X 820/ 860       | 1245 X 560 X 820/ 860       |

| TECHNICAL SPECIFICATIONS                 | DCL-3 + DCL-M2L+M2L+M2R     | DCL-3C + DCL-M2LG+M2LG+M2RG | DCL-4 + DCL-M2L+M2L+M2L+M2R | DCL-4C + DCL-M2LG+M2LG+M2LG+M2RG |
|------------------------------------------|-----------------------------|-----------------------------|-----------------------------|----------------------------------|
| GROSS / NET VOLUME (L)                   | 455/ 422                    | 455/ 422                    | 616/ 574                    | 616/ 574                         |
| GROSS / NET WEIGHT (KG)                  | 139/ 124,5                  | 148/ 133,5                  | 170/ 151,5                  | 182/ 163,5                       |
| TEMPERATURE RANGE (°C)                   | +2°C / +10°C                | +2°C / +10°C                | +2°C / +10°C                | +2°C / +10°C                     |
| CLIMATE CLASS                            | 4                           | 4                           | 4                           | 4                                |
| DESIGN AND MATERIAL                      |                             |                             |                             |                                  |
| BOTTOM SHELF DIMENSIONS (MM)             | 1345 X 460                  | 1345 X 460                  | 1800 X 460                  | 1800 X 460                       |
| EXTERIOR / INTERIOR FINISH (COLOUR)      | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER | ANTHRACITE RAL 7021/ SILVER      |
| NUMBER (PCS)/ DOOR TYPE                  | 3/ HINGED SOLID             | 3/ HINGED GLASS             | 4/ HINGED SOLID             | 4/ HINGED GLASS                  |
| SHELVES NO (PCS)/ TYPE                   | 6/ ADJUSTABLE               | 6/ ADJUSTABLE               | 8/ ADJUSTABLE               | 8/ ADJUSTABLE                    |
| SHELF COLOR (RAL)                        | SILVER                      | SILVER                      | SILVER                      | SILVER                           |
| SHELF DIMENSIONS V x D (MM)              | 370 X 428                   | 370 X 428                   | 370 X 428                   | 370 X 428                        |
| MAX LOAD ON SHELVES (Kg/m²)              | 180                         | 180                         | 180                         | 180                              |
| ADJUSTABLE FEET                          | YES                         | YES                         | YES                         | YES                              |
| LOCK (FACTORY OPTION)                    | YES                         | YES                         | YES                         | YES                              |
| INTERIOR LIGHT (LED)                     | YES/ WHITE                  | YES/ COLOUR (RGB)           | YES/ WHITE                  | YES/ COLOUR (RGB)                |
| SEPARATE LIGHT SWITCH                    | YES                         | NO/ REMOTE CONTROL          | YES                         | NO/ REMOTE CONTROL               |
| COOLING AND FUNCTIONS                    |                             |                             |                             |                                  |
| TYP TERMOSTATU/ DIGITÁLNÍ OVLÁDÁNÍ       | ELECTRONIC/ YES             | ELECTRONIC/ YES             | ELECTRONIC/ YES             | ELECTRONIC/ YES                  |
| TYPE OF COOLING                          | VENTILATED                  | VENTILATED                  | VENTILATED                  | VENTILATED                       |
| AUTOMATIC DEFROST                        | YES                         | YES                         | YES                         | YES                              |
| REFRIGERANT TYPE/ REFRIGERANT CHARGE (G) | R 290/ 80                   | R 290/ 80                   | R 290/ 80                   | R 290/ 80                        |
| POWER AND CONSUMPTION                    |                             |                             |                             |                                  |
| ENERGY CLASS                             | C                           | C                           | C                           | D                                |
| ANNUAL ENERGY CONS. (KWH/ROK)            | 463                         | 605                         | 563                         | 798                              |
| ENERGY CONSUMPTION (KWH/24H)             | 1,26                        | 1,65                        | 1,54                        | 2,18                             |
| INPUT POWER (W)                          | 300                         | 300                         | 300                         | 300                              |
| VOLTAGE/ FREQUENCY (V/Hz)                | 220-240/ 50                 | 220-240/ 50                 | 220-240/ 50                 | 220-240/ 50                      |
| NOISE LEVEL dB (A)                       | 41                          | 41                          | 41                          | 41                               |
| DIMENSIONS                               |                             |                             |                             |                                  |
| DIMENSIONS V x D x H (MM)                | 1720 X 560 X 820/ 860       | 1720 X 560 X 820/ 860       | 2200 X 560 X 820/ 860       | 2200 X 560 X 820/ 860            |